


## Nylbloc™ auto screwless connection terminals

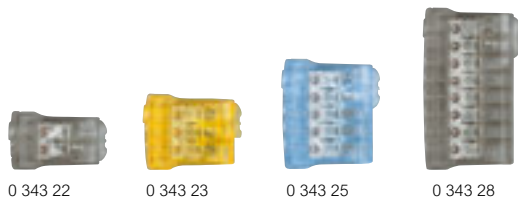

Pack	Cat.Nos	<b>Screwless connection terminals - Nylbloc auto</b>
100	0 343 22	Grey terminal for 2 wires
100	0 343 23	Orange terminal for 3 wires
100	0 343 25	Blue terminal for 5 wires
50	0 343 28	Grey terminal for 8 wires

No tool direct connection after simple stripping of copper conductors  
 Test socket for tester screwdriver or test tip  
 Cat.No 0 394 45 (p. 306) for IP 2X test or Ø4 mm tip on Nylbloc auto terminals  
 Conform to EN 60998-2-2  
 For rigid cable from 0.75 to 2.5 mm<sup>2</sup>  
 Stripping length: 11 mm  
 Connection by separate crimping blades  
 Transparent base providing full visibility of the connections  
 Colour code to identify products  
 Duplex marking possible on 3.5 and 8-wire terminals  
 Max. intensity: 24 A  
 Insulating voltage: 450 V~

Pack	Cat.Nos	<b>Accessories</b>
1/5	0 343 99	<b>Conductor stripping tool</b> For cable desheathing and rapid wire stripping in flush-mounting and junction boxes, in trunking For cable Ø8 mm to 13 mm (from 2 G 1.5 to 5 G 2.5 mm <sup>2</sup> ) and wires 1.5 mm <sup>2</sup> and 2.5 mm <sup>2</sup>
10	0 343 98	<b>Nylbloc auto terminal support</b> For up to 3 screwless connection terminals Nylbloc auto (Cat.Nos 0 343 22/23/25/28) Direct fixing: - in top of Plexo boxes and industrial plastic cabinets ≥ 130 x 130 mm - on flat bar 12 x 2 mm - in bottom of fully assembled, adaptable and aluminium DLP trunkings (from 50 x 80 mm) Screw fixing: - in bottom of Plexo boxes ≥ 105 x 105 mm and industrial plastic cabinets - universal Fixing on rail with accessory Cat.No 0 048 11 (p. 190) Accessible test socket Marking zone with felt tip pen Cat.No 0 395 98 (p. 304)

## Nylbloc™ connection strips and connectors without screws



Pack	Cat.Nos	<b>Nylbloc connection strips</b>
10	0 342 11	Black
10	0 342 13	Black
10/200	0 342 15	Black
10	0 342 17	Black
10	0 342 19	Black
10	0 342 21	White
10	0 342 23	White
10	0 342 25	White
10	0 342 27	White

12 elements with captive screws  
 Supplied with screws undone  
 Flame retardant polypropylene (-25 °C to +100 °C)  
 Ambient temperature from -25 °C to +55 °C (T 55)  
 Conform to EN 60998-2-1 and EN 60664-1  
 Self-extinguishing to EN 60695-2-11 at 850°  
 Insulation voltage: 250 V according to EN 60 998-2-1  
 Use at 400 V integrated in a series of products that comply with the requirements of EN 60664-1, pollution degree 2, overload category III

Rated capacity (mm <sup>2</sup> )	Hole Ø (mm)	Max current (A)
2.5	2.5	24
6	3.5	41
10	4.5	57
16	5.5	76
25	7	101
2.5	2.5	24
6	3.5	41
10	4.5	57
16	5.5	76

Pack	Cat.Nos	<b>Connectors without screws - Capvis caps</b>
100/1000	0 343 38	Blue
100/1000	0 343 44	Orange
100/2000	0 343 51	Yellow
100	0 343 57	Red
2 000	6 340 51	Yellow
1 500	6 340 52	Red

Rapid connection for 1.5 - 2.5 - 4 and 6 mm<sup>2</sup> solid conductor cables - 440 V insulation

Nominal capacity (mm <sup>2</sup> )	No of cables and corresponding sections (mm <sup>2</sup> )	Cap colour	Packaging type
1.5	3 to 5 of 0.5 <sup>2</sup> 2 to 4 of 0.75 <sup>2</sup> 2 of 1.5 <sup>2</sup>	blue	box
1.5 to 2.5	3 to 5 of 0.5 <sup>2</sup> 2 to 5 of 0.75 <sup>2</sup> 2 to 3 of 1.5 <sup>2</sup> 2 of 2.5 <sup>2</sup>	orange	box
4	2 to 4 of 1.5 <sup>2</sup> 2 to 3 of 2.5 <sup>2</sup> 2 of 4 <sup>2</sup>	yellow	box
6	2 to 5 of 2.5 <sup>2</sup> 2 to 3 of 4 <sup>2</sup> 2 of 6 <sup>2</sup>	red	box
4	2 to 4 of 1.5 <sup>2</sup> 2 to 3 of 2.5 <sup>2</sup> 2 of 4 <sup>2</sup>	yellow	bucket
6	2 to 5 of 2.5 <sup>2</sup> 2 to 3 of 4 <sup>2</sup> 2 of 6 <sup>2</sup>	red	bucket